


CUSTOM COMPOSITE SHUTTERS

COMPOSITE LOUVERED, CLOSED

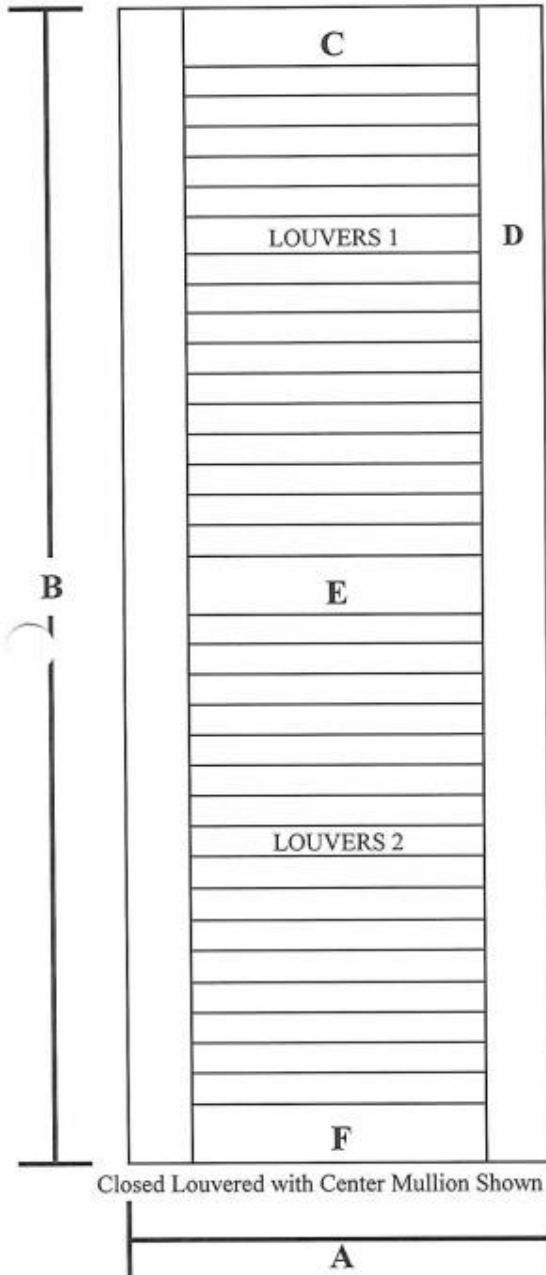

Closed Louvered with Center Mullion Shown

A. Width of shutter

Min: 10"
Max: Any

C. TOP: 3" Wide, Standard

Min: 2"
Max: Any

D. Rail or Stile: 2" Wide, Standard

Min: 2"
Max: Any

E. Center or Center Mullion: 3" Wide, Standard

Min: 2"
Max: Any

Louver

No modification available
Angle of Louver: 18°
Width: 1"

Distance from tip of one Louver to tip of next Louver: 1"

Frame Thickness

Composite: 1 1/4", Standard
No Modifications Available

F. Bottom: 3"- 4" Wide, Standard

Min: 2"
Max: Any

Note: Bottom varies between 3" and 4" depending on number of Louvers

B. Length of shutter

Min: 30" with center
Min: 20" with no center
Max: 192"

Note: Need center every 48" (minimum) or Warranty not Valid

B3

Width and Length must be in increments of 1/4" or more